




Serie **UNI-SFER**

Articolo **1521**

Full bore ball valve, M/F threaded, with aluminium T-handle.

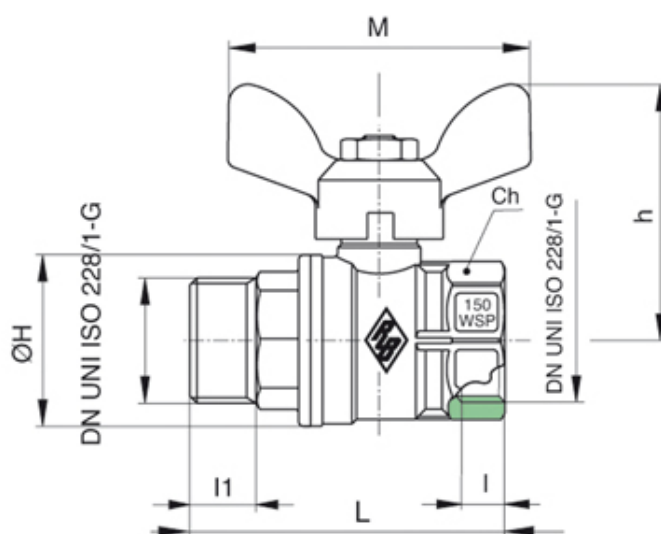

| POS. | PART NAME         | MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL | N°P |
|------|-------------------|---------------------------------------------------|-----|
| 1    | BODY              | OTTONE CW617N UNI EN 12165                        | 1   |
| 2    | END CONNECTION    | OTTONE CW617N UNI EN 12165                        | 1   |
| 3    | BALL              | OTTONE CW617N UNI EN 12165                        | 1   |
| 4    | STEM              | OTTONE CW614N UNI EN 12164                        | 1   |
| 5    | HANDLE            | ACCIAIO DC04 EN 10020                             | 1   |
| 6    | BALL SEAT         | P.T.F.E                                           | 2   |
| 7    | ANTIFRICTION SEAT | P.T.F.E                                           | 1   |
| 8    | O-RING            | FKM                                               | 2   |
| 9    | O-RING            | NBR                                               | 2   |
| 10   | NUT               | ACCIAIO CL 04                                     | 1   |

| MISURA SIZE | DN | BOX | MASTER BOX | CODICE CODE | I    | I1   | L    | ØH   | Ch | M  | h    | Kv   | PN | Kg   |
|-------------|----|-----|------------|-------------|------|------|------|------|----|----|------|------|----|------|
| 1/4"*       | 8  | 25  | 50         | 1721020000  | 11   | 11   | 59   | 23   | 20 | 50 | 42   | 5,4  | 64 | 0,13 |
| 3/8"*       | 10 | 25  | 50         | 1721030000  | 11,4 | 11,4 | 59,5 | 23   | 20 | 50 | 42   | 6    | 64 | 0,13 |
| 1/2"        | 15 | 50  | 100        | 1521040000  | 12   | 13   | 59   | 30   | 25 | 50 | 40,5 | 16,3 | 30 | 0,17 |
| 3/4"        | 20 | 30  | 60         | 1521050000  | 12   | 13   | 66,5 | 36   | 31 | 64 | 50,5 | 29,5 | 30 | 0,27 |
| 1"          | 25 | 20  | 40         | 1521060000  | 14,5 | 15   | 77,7 | 43,5 | 38 | 64 | 53   | 43   | 30 | 0,41 |

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.

\* Art.1721



**RUBINETTERIE  
BRESCIANE**

