




Serie **UNI-SFER**

Articolo **1501**

Full bore ball valve, M/F threaded, with pressed steel handle.

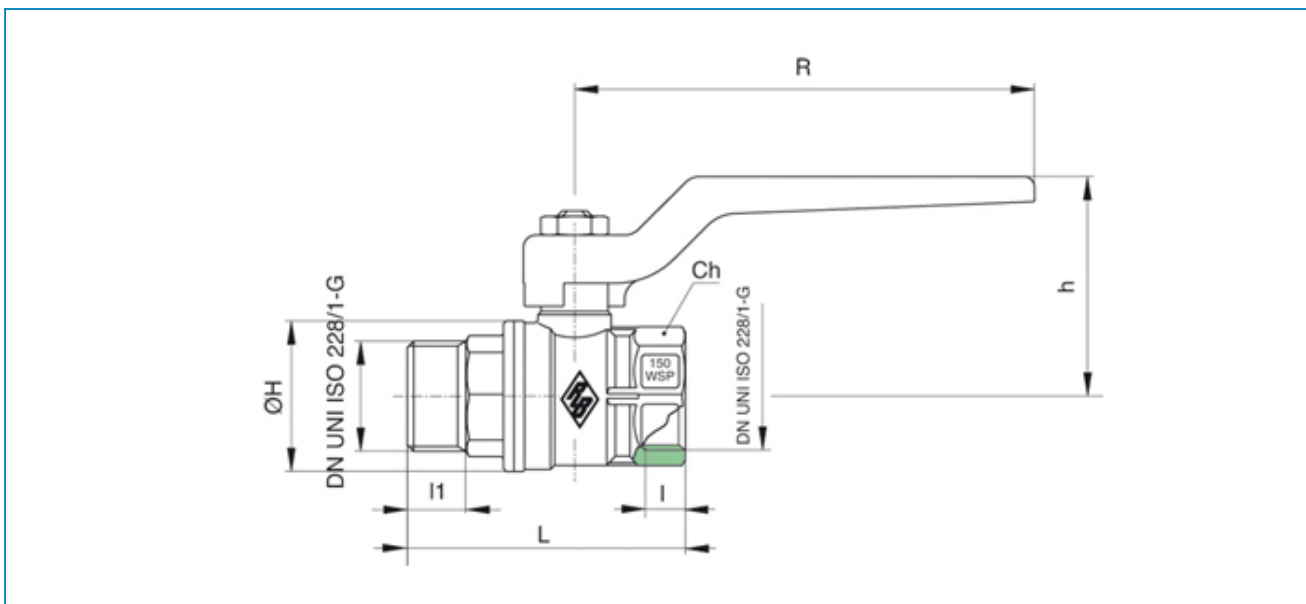

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ACCIAIO DC04 EN 10020	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL 04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	II	L	ØH	Ch	R	h	Kv	PN	Kg
1/4"*	8	25	50	1701020000	11	11	59	23	20	95	47,5	5,4	64	0,14
3/8"*	10	25	50	1701030000	11,4	11,4	59,5	23	20	95	47,5	6	64	0,14
1/2"	15	35	70	1501040000	12	13	59	30	25	84,5	40,5	16,3	30	0,18
3/4"	20	25	50	1501050000	12	13	66,5	36	31	110	52	29,5	30	0,29
1"	25	15	30	1501060000	14,5	15	77,7	43,5	38	110	54,5	43	30	0,43
1"1/4	32	10	20	1501070000	16	17	91,2	53	48	140	69	89	25	0,78
1"1/2	40	6	12	1501080000	18	18	104,7	65	54	140	74,5	230	25	1,08
2"	50	4	8	1501100000	19	22	121	80	67	170	85	265	25	1,65

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.

* Art.1701