



**PATENTED**

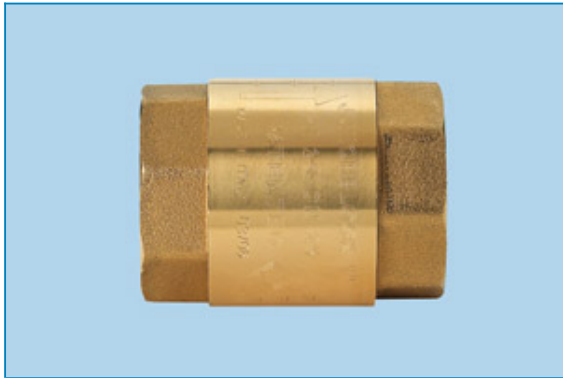

Serie **JUNIORBLOCK**

Articolo **100200**

Reduced bore check valve, UNI ISO 228/1-G F/F threaded.

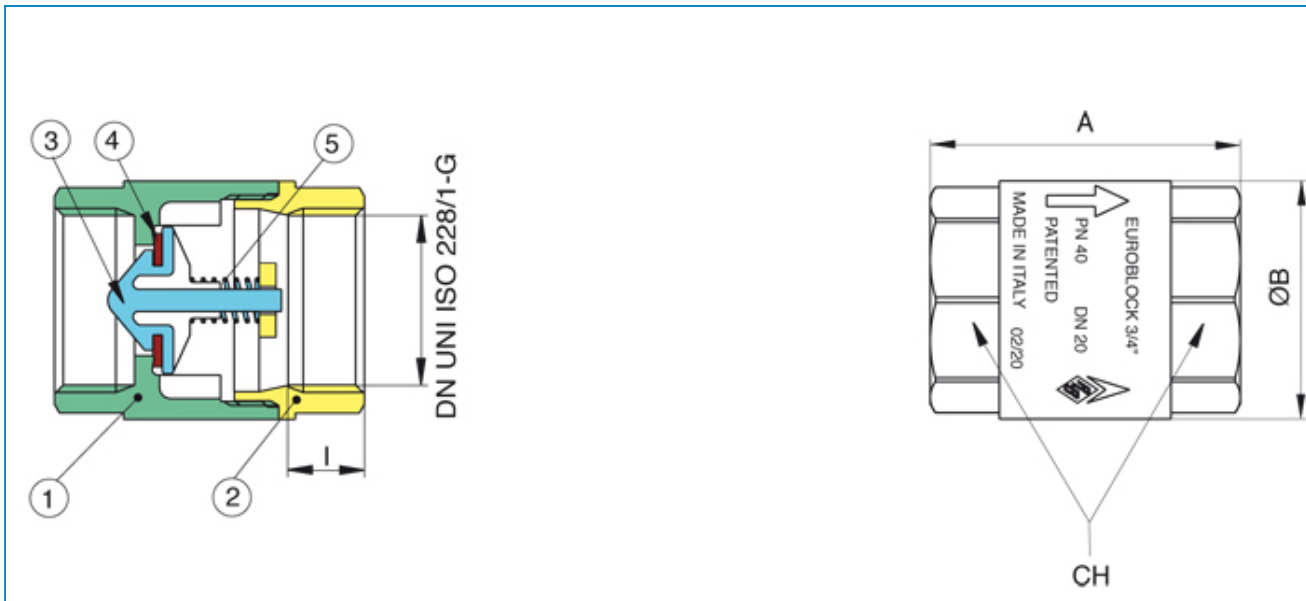

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN12165	1
2	END CONNECTION	OTTONE CW617N UNI EN12165	1
3	SPRING	ACCIAIO INOX AISI 302	1
4	FLAT SEAT	NBR	1
5	OBSTRUCTOR	PEI (ULTEM 1000)	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	Ch	ØB	A	Kv	PN	Kg
1/2"	15	40	240	10020004	12	25	28	44,5	3,7	40	0,10
3/4"	20	20	120	10020005	12	31	34,5	47,5	5,8	40	0,16
1"	25	15	90	10020006	14,5	38	42	56	8,6	25	0,25
1"1/4	32	6	36	10020007	16	48	52	62	13,8	25	0,40
1"1/2	40	4	24	10020008	18	54	61	70	20,2	16	0,58
2"	50	8	16	10020010	19	67	73	78	30,9	16	0,88
2"1/2	65	6	12	10020012	24	83	90	92	48,8	12	1,41
3"	80	2	4	10020014	29	98	113	113,5	79,4	12	2,42
4"	100	2	4	10020018	32	128	139	126,8	124,9	10	4,29

Limiti di temperatura: -20°C +100°C - Temperature range: -20°C +100°C.