




Serie **UNI-SFER**

Articolo **1520**

Full bore ball valve, F/F threaded, with aluminium T-handle.

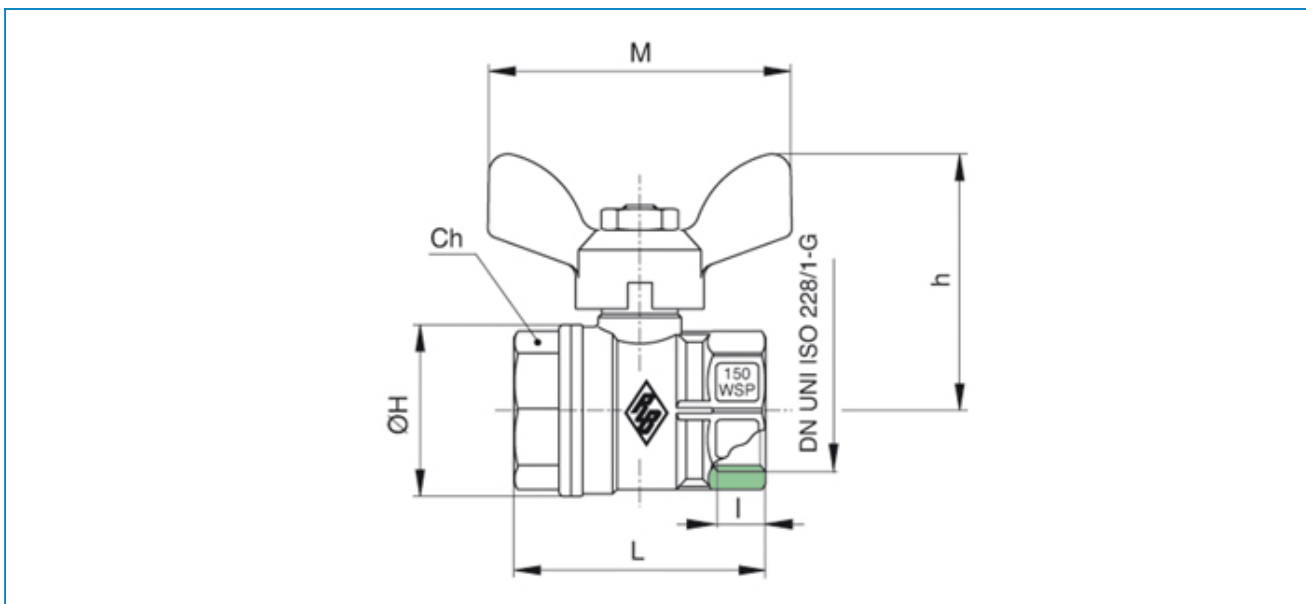

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ACCIAIO DC04 EN 10020	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL.04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	L	ØH	Ch	M	h	Kv	PN	Kg
1/4"*	8	25	50	1720020000	11	51,5	23	20	50	42	5,4	64	0,14
3/8"*	10	25	50	1720030000	11,4	51,5	23	20	50	42	6	64	0,12
1/2"	15	50	100	1520040000	12	47,5	30	25	50	40,5	16,3	30	0,14
3/4"	20	35	70	1520050000	12	53	36	31	64	50,5	29,5	30	0,24
1"	25	20	40	1520060000	14,5	65,5	43,5	38	64	53	43	30	0,37

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.

* Art.1720