


Serie **FIDO.SFER**

Articolo **5981**

Full bore ball valve for gas, M/F threaded, with yellow steel handle.

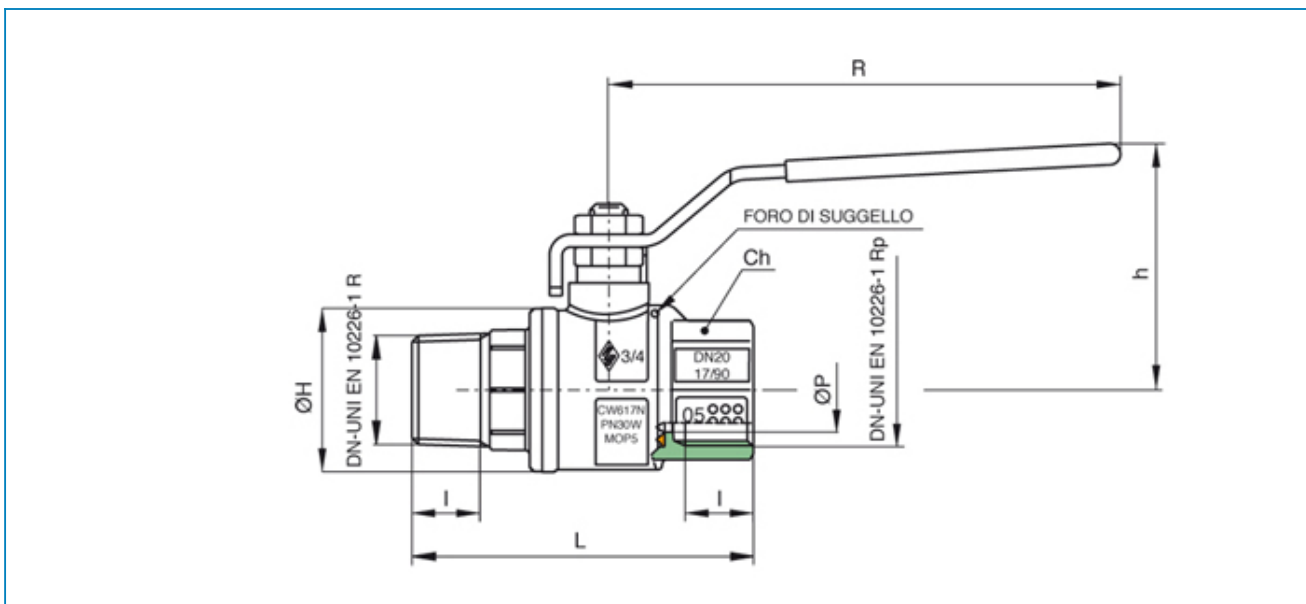

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	PACKING GLAND	OTTONE CW614N UNI EN 12164	1
6	T-HANDLE	ALLUMINIO EN-AC 46100 EN 1706	1
7	BALL SEAT	P.T.F.E	2
8	STEM SEAL/THRUST WASHER	P.T.F.E	2
9	O-RING	NBR	1
10	DADO	ACCIAIO CL 04	2

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	ØP	I	L	ØH	Ch	R	h	MOP	Kg
1/4"	8	25	50	5981020000	10	11	58,5	23	20	96	47,5	5	0,14
3/8"	10	25	50	5981030000	10	11,4	59,5	23	20	96	47,5	5	0,13
1/2"	15	35	70	5981040000	15	15	72,5	33	25	96	51	5	0,21
3/4"	20	25	50	5981050000	20	16,3	81,5	39	31	121	62	5	0,33
1"	25	15	30	5981060000	25	19,1	94,5	49	38	121	66	5	0,53
1"1/4	32	10	20	5981070000	32	21,4	111	59	48	151	80	5	0,97
1"1/2	40	6	12	5981080000	40	21,4	119	73	54	151	86	5	1,45
2"	50	4	-	5981100000	50	25,7	141	87	67	160	105	5	1,98

Limiti di temperatura: -20°C +90°C - Temperature range: -20°C +90°C.