


PATENTED



Serie **EUROFLY**

Articolo **600000**

Brass butterfly valve full bore, F/F threaded with throttling.

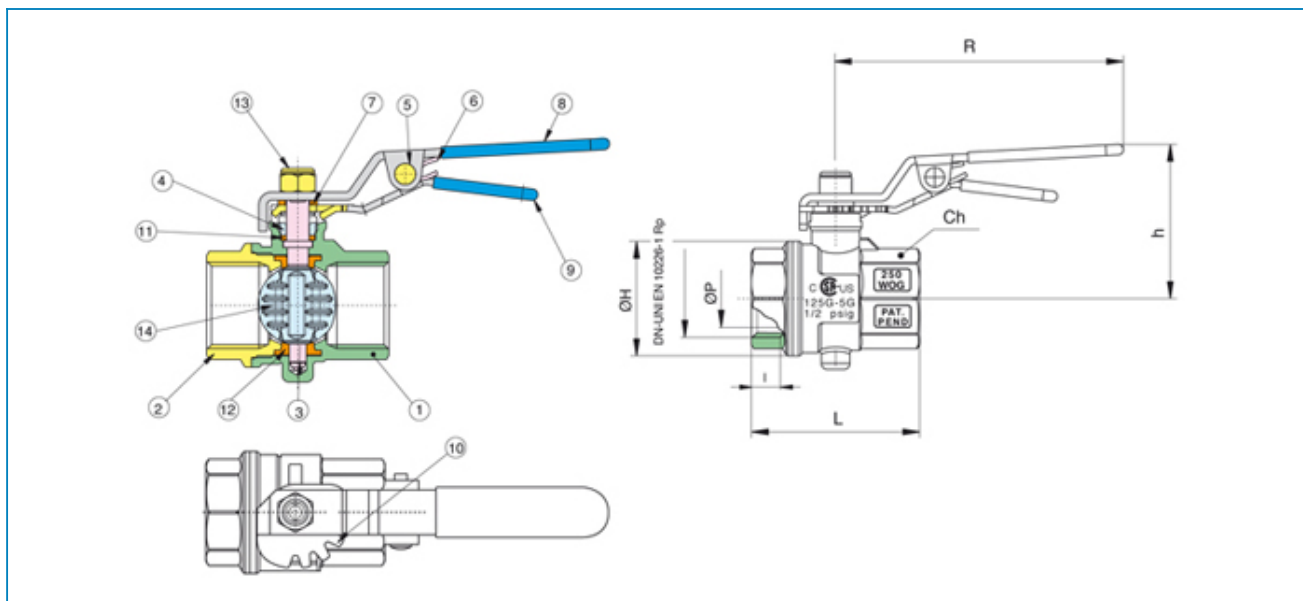

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	STEM	OTTONE CW614N UNI EN 12164	1
4	WASHER	OTTONE CW614N UNI EN 12164	1
5	LOCK PIN	ACCIAIO	1
6	SPRING	ACCIAIO PER MOLLE	1
7	ANTI-FRICTION SEAT	PTFE CARICATO GRAFITE	1
8	HANDLE	ACCIAIO DD11 UNI EN 10111	1
9	HANDLE	ACCIAIO UNI EN 10111	1
10	HALF TURN STOP	ACCIAIO UNI EN 10111	1
11	STEM SEAL	PTFE	1
12	SEAT	EPDM	1
13	NUT	ACCIAIO CL 04	1
14	DISC	PEI (ULTEM 1000)	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	ØP	I	Ch	ØH	L	h	R	Kv	PN	Kg
1/2"	15	50	100	60000004	16	15	25	31	48,5	46,5	95	8,5	16	0,19
3/4"	20	25	50	60000005	21	16,3	31	38	56	50,5	95	17	16	0,25
1"	25	20	40	60000006	27	19,1	38	46	64	54	95	27	16	0,36
1"1/4	32	12	24	60000007	34	21,4	48	55,5	76	71,5	120	50	16	0,67
1"1/2	40	10	20	60000008	41	21,4	54	65,5	82	76,5	120	82,5	16	0,88
2"	50	4	8	60000010	52	25,7	67	77,5	93	86,5	150	136,5	16	1,31
2"1/2	65	2	4	60000012	65	30,2	90	102	112	121	205	240	16	3,06
3"	80	-	4	60000014	80	33,3	105	122	129,5	131,5	205	340	16	4,67
4"	100	-	2	60000018	103	39,3	130	145	146	145	205	550	16	6,29

Limiti di temperatura: -10°C + 130°C - Temperature range: -10°C + 130°C.



**RUBINETTERIE
BRESCIANE**



